



Manufacturing Equipment for Abatement
and Restoration Industry Since 1988

MiniForce II

HEPA Air Filtration Machine

MiniForce II is a compact, portable HEPA air scrubber for small projects and restricted spaces. The MiniForce II is used as negative air machine for removal of toxic mold, asbestos and lead dust during renovation and abatement projects. For removal of chemical fumes, VOCs and biological contaminants, activated carbon filters can be installed.

The MiniForce II provides cleaner and healthier environment at construction/renovation projects and industrial facilities.

MiniForce II Specifications


Airflow Ratings (cfm)*	350 & 425
Operating Speeds	2 speeds
Filtration Stages	HEPA Filter 99.97%, 0.3µm
MERV8 primary/secondary filter
Optional	OdorGuard 600 activated carbon filter
Motor	1/5 hp with Thermal Overload
Circuit Requirements	115V 60Hz 3.2 amps
Pressure Gauge	0-3" W.C.
Cabinetry	Aluminum, silicone sealed before riveting
Exhaust Collar	8"
Carrying Handles w/Rubber Grips	1
3" Hospital Grade Casters	4 Swivel with Brakes
Weight With Filters	43 lbs.
Dimensions	26.5"L x 14"W x 16"H

*Airflows based on blower manufacturer curves. Different HEPA filters may cause the flow to vary.



ORDERING INFO PART

Omniaire MiniForce II	MF100C
HEPA Filter 99.97%, 0.3µm	MFH12
Primary/Secondary Filter (qty 20) ...	MFP1313
Intake Manifold, 8"	MFIM8
Quick Clamp, 8 to 10"	QCW12
Flexible Duct, 8" x 25'	MD8
OdorGuard 600 Carbon Filter	OG1212

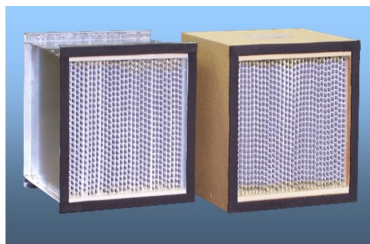

The Omniaire MiniForce II comes standard with a particle board 99.97% 0.3µm HEPA filter and can be upgraded to a metal frame 99.99% 0.3µm HEPA filter.

Optional Accessories



CONFORMS TO UL STD 507
CERTIFIED TO CAN/CSA STD
C22.2 NO. 113-M1984

Omnitec Design, Inc.

4640 Campus Place, Suite 110 Mukilteo, WA 98275

Visit us @ www.omnitecdesign.com

Office: 425-290-3922