



Manufacturing Equipment for Abatement
and Restoration Industry Since 1988

OA1000V

HEPA Air Filtration Machine

The OmniAire OA1000V air scrubber with HEPA filter is used for removal of toxic mold, asbestos and lead dust during renovation and abatement projects. Accessories include activated carbon filters for chemical fumes and biological contaminants.

The OmniAire provides cleaner and healthier environment at construction/renovation projects and industrial facilities.

OmniAire 1000V SPECIFICATIONS


Airflow Ratings (cfm)*	300 to 950
Operating Speeds	Variable speed control
Filtration Stages	HEPA Filter 99.97%, 0.3µm
	MERV8 primary/secondary filter
Optional	OdorGuard 600 activated carbon filter
Motor	1/2 hp with Thermal Overload
Circuit Requirements	115V 60Hz 5.8 amps
Pressure Gauge	0-3" W.C.
Cabinetry	Aluminum, silicone sealed before riveting
Exhaust Collar	10"
Carrying Handles w/Rubber Grips	1
3" Hospital Grade Casters	4 Swivel with Locks
Weight With Filters	75 lbs.
Dimensions	32"Lx18"Wx21"H

*Airflows based on blower manufacturer curves. Different HEPA filters may cause the flow to vary.



ORDERING INFO PART

OmniAire 1000V	OA1000V
HEPA Filter 99.97%, 0.3µm	OAH1616
Primary/Secondary Filter (qty 20)	OAP1818
Intake Manifold, 10"	OAIM10
Quick Clamp, 8 to 10"	QCW12
Flexible Duct, 10" x 25'	OAD10
OdorGuard 600 Carbon Filter	OG1616

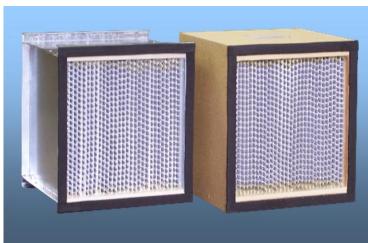

The OmniAire OA1000V comes standard with a particle board 99.97% 0.3µm HEPA filter and can be upgraded to a metal frame 99.99% 0.3µm HEPA filter.

Optional Accessories



CONFORMS TO UL STD 507
CERTIFIED TO CAN/CSA STD
C22.2 NO. 113-M1984

Omnitec Design, Inc.

4640 Campus Place, Suite 110 Mukilteo, WA 98275
Visit us @ www.omnitecdesign.com
Office: 425-290-3922