



Manufacturing Equipment for Abatement
and Restoration Industry Since 1988

OmniAire 600V

HEPA Air Filtration Machine

The OmniAire 600V air scrubber with HEPA filter is used for removal of toxic mold, asbestos and lead dust during renovation and abatement projects. Accessories include activated carbon filters for chemical fumes and biological contaminants.

The OmniAire provides cleaner and healthier environment at construction/renovation projects and industrial facilities.

OmniAire 600V Specifications


Airflow Ratings (cfm)*	150 to 600
Operating Speeds	Variable speed control
Filtration Stages	HEPA Filter 99.97%, 0.3μ
MERV 8 primary/secondary filter
Optional	OdorGuard 600 carbon filter
Pressure Gauge	0-3" W.C.
Motor	1/4 hp with Thermal Overload
Circuit Requirements	115V 60Hz 3.5 amps
Pressure Gauge	0-3" W.C.
Cabinetry	Aluminum, silicone sealed before riveting
Exhaust Collar	8"
Carrying Handles w/Rubber Grips	2
3" Hospital Grade Casters	4 Swivel with Breaks
Weight With Filters	55 lbs.
Dimensions	30.5"Lx14"Wx18.5"H

*Airflows based on blower manufacturer curves. Different HEPA filters may cause the flow to vary.



ORDERING INFO PART

OmniAire 600V	OA600V
HEPA Filter 99.97%, 0.3μ	MFH12
Primary/Secondary Filter (qty 20) ...	MFP1313
Intake Manifold, 8"	MFIM8
Quick Clamp, 8 to 10"	QCW12
Flexible Duct, 8" x 25'	MD8
OdorGuard 600 Carbon Filter	OG1212

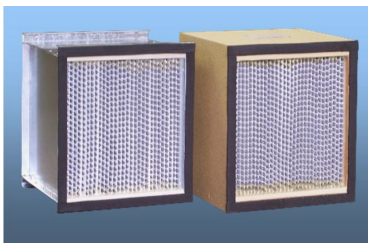

The OmniAire 600V comes standard with a particle board 99.97% 0.3μ HEPA filter and can be upgraded to a metal frame 99.99% 0.3μ HEPA filter.

Optional Accessories



CONFORMS TO UL STD 507
CERTIFIED TO CAN/CSA STD
C22.2 NO. 113-M1984

Omnitec Design, Inc.

4640 Campus Place, Suite 110 Mukilteo, WA 98275
Visit us @ www.omnitecdesign.com
Office: 425-290-3922