



OMNIFLOW


Water Filtration System

ORDERING INFO

OmniFlow
Water Filter, 20 Micron
Water Filter, 5 Micron

PART NUMBER

OWF115
OWF20
OWF5

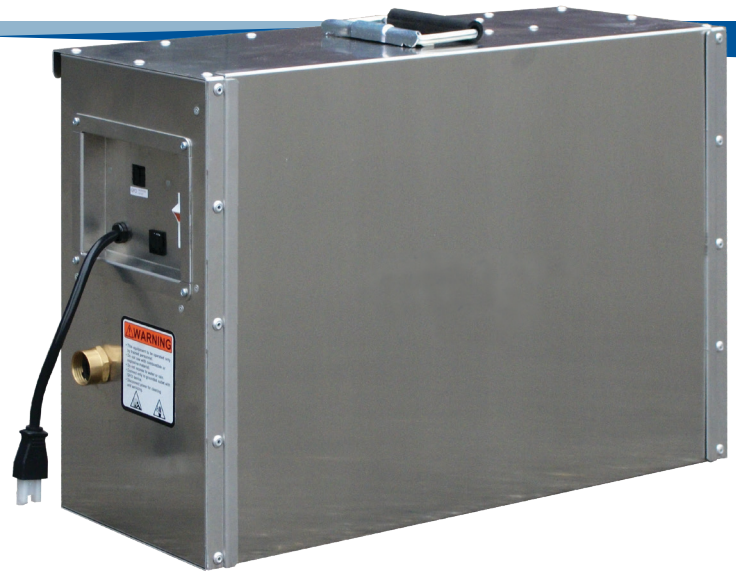

THE OMNIFLOW IS IDEAL FOR

Abatement
Remediation Jobs
Restoration Projects



CONFORMS TO UL STD 507
CERTIFIED TO CAN/CSA STD
C22.2 NO. 113-M1984

The OmniFlow is commercial and industrial water filtration system designed for purification of contaminated water at asbestos, lead abatement projects and similar sources at construction sites. Our portable system consists of self priming, positive displacement pump and two filtration stages with 20 and 5 micron filters. The unit is capable of high suction lift and 45 psi discharge pressure. This portable unit has a strong aluminum housing with rubber grip handle and easily accessible hose connections. OmniFlow's two-stage filtration allows for the use of various filter cartridges to meet your requirements. Our standard configuration consists of a 20 μ and 5 μ filter.

The OmniFlow

Flow Capacity	3 gpm
Filtration Stages	50# screen, 20 & 5 micron filters
Water Connection	3/4" male garden hose connection
Power Requirements	115 VAC/60Hz, 1.0 amps
Electrical Protection	circuit breaker
Housing	aluminum, riveted construction
Size/Weight	8"W x 15"H x 23"L; 25 lbs. (with filters)