



PEROX 1000-3


Air Purifier with IO Technology

ORDERING INFO

- Perox 1000-3
- 2" Pleated MERV 11
- 14" Perox Replacement Cell
- 9" Perox Replacement Cell
- Quick Clamp, 12"-16" Dia.
- Flexible Duct, 12" Dia. x 25' L
- Flexible Duct, Wire & Fiber Reinforced

PART NUMBER

- OAHPG1000-3
- OFF2416
- EHPG-4
- EHPG-3
- QCW14
- OAD12
- OAD12R

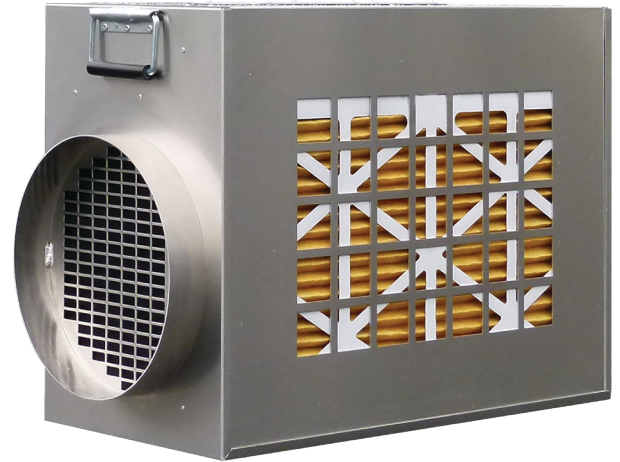

CONFORMS TO UL STD 507
CERTIFIED TO CAN/CSA STD
C22.2 NO. 113-M1984

The Perox 1000-3 air purifier is a powerful tool used at fire and flood restoration projects, during mold abatement, and can control of any type of VOCs, odor and dangerous bio-contaminants. This portable unit can be safely operated in occupied areas, controlling odors during restoration projects and final cleanup. The purification process utilizes ionized-hydroperoxide oxidizer plasma, which rapidly sanitizes the air passing through our unit and continues to seek bio-contaminants in the surrounding air and on all the surfaces. The Perox air purifier will destroy mold and mildew, smoke, chemical fumes, paint odors, cleaning chemical odors, pet odors, sewer odors, decaying organic matter, volatile organic compounds, tobacco odor and many other bio-contaminants.

Perox 1000-3

Airflow*	300-650 CFM
Power Requirements	115VAC/60 Hz/3 Amp or 230VAC 50-60 Hz/1.6 Amps
Motor	motorized impeller with thermal overload
Controls	ON/OFF switch; variable speed control, (2) hour meters; (2) ON/OFF generator switches
Filtration	16"x24"x2" MERV 11 pleated filter; 16"x24"x1" pleated carbon filters
IO Generator	(1) 9" ionic oxidation generator; (1) 14" ionic oxidation generator
Housing	aircraft grade aluminum; 12" outlet; (2) rubber grip handles
Size/Weight	14"W x 20"H x 27"L; 40 lbs.

*Airflows based on blower manufacturer curves. Different filters may cause the flow to vary.