

OA2000V


HEPA Air Filtration Machine

OmniAire 2000V is a versatile air scrubber with high airflow, variable speed and many accessories. It is used for removal of toxic mold, asbestos and lead dust during renovation and abatement projects. Equipped with a 99.97% HEPA filter and 2-stage pre-filter, it is used on asbestos, lead and mold abatement projects. The HEPA filter can be replaced with an economical Bag Filter with high capacity to collect bulk dust from cutting or grinding of concrete, wood or plaster.

OmniAire 2000V SPECIFICATIONS

- Airflow Ratings (cfm)*** 400 - 1600
- Operating Speeds** Variable Speed Control
- Filtration Stages** -HEPA Filter 99.97%, 0.3µ
 -MERV 8 primary/secondary filter
 - Optional - ...OdorGuard600 Activated Carbon filter
 - 9-Pocket Bag Filter, MERV14
- Recessed Controls** with: ..High/OFF/Speed Control Switch
 -Variable Speed Controller
 -Pressure Gauge 0 - 5"WC
- Motor** 1 1/2 hp with Thermal Overload
- Circuit Requirements**** 115VAC 60Hz 12.0 amps
- Cabinetry** Aluminum, silicone sealed before riveting
- Exhaust Collar** 12"
- Carrying Handles w/Rubber Grips** 4
- 5" Casters** 2 Fixed, 2 Swivel
- Weight with Filter** 115 lbs
- Dimensions** 34"L x 20"W x 31"H

*Airflows based on blower manufacturer curves. Different HEPA filters may

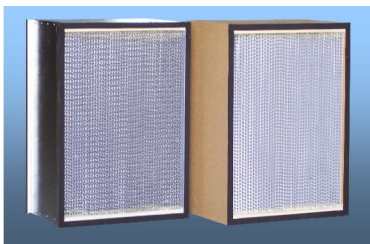

The OmniAire 2000V comes standard with a particle board 99.97% 0.3µ HEPA filter and can be upgraded to a metal frame 99.99% 0.3µ HEPA filter.



CONFORMS TO UL STD 507
CERTIFIED TO CAN/CSA STD
C22.2 NO. 113-M1984



ORDERING INFO	PART #
OmniAire 2000V.....	OA2000V
HEPA Filter 99.97%, 0.3µ.....	OAH2418
Primary/Secondary Filter (qty 20).....	OFP2518
Intake Manifold, 12".....	OAIM2000-12
Carbon Vapor Trap Filter.....	OCVT2418
OdorGuard 600 Carbon Filter.....	OG2418
Bag Filter Housing.....	HBF2000
Bag Filter, 95% ASHRAE.....	OBF9
Flexible Duct, 12" x 25'.....	OAD12

Optional Accessories



Omnitec Design, Inc.

4640 Campus Place, Suite 110 Mukilteo, WA 98275
Visit us @ www.omnitecdesign.com
Office: 425-290-3922