



Manufacturing Equipment for Abatement and Restoration Industry Since 1988

# OA1300V HEPA Air Filtration Machine

*The OmniAire 1300V air scrubber with HEPA filter is used for removal of toxic mold, asbestos and lead dust during renovation and abatement projects. This machine is only 14" wide and ideal for narrow hallways, hotel rooms and condos. Accessories include activated carbon filters for chemical fumes and biological contaminants. The OmniAire 1300V provides cleaner and healthier environment at construction/renovation projects and industrial facilities.*

## OmniAire 1300V SPECIFICATIONS


- Airflow Ratings (cfm)\* .....300 to 1250
- Operating Speeds..... Variable speed control
- Filtration Stages.....HEPA Filter 99.97%, 0.3µ  
.....MERV 8 primary/secondary filter
- Optional ..... OdorGuard 600 carbon filter
- Pressure Gauge..... 0-5" W.C.
- Motor ..... 1 hp with Thermal Overload
- Circuit Requirements .....115V 60Hz 8.7 amp
- Cabinetry ..... Aluminum, silicone sealed before riveting
- Exhaust Collar .....10"
- Carrying Handles w/Rubber Grips..... 4
- 3" Casters ..... 4 Swivel
- Net Weight With Filters ..... 90 lbs.
- Dimensions ..... 33"Lx14"Wx29"H

\*Airflows based on blower manufacturer curves. Different HEPA filters may cause the flow to vary.



ORDERING INFO .....	PART #
OmniAire 1300V .....	OA1300V
HEPA Filter 99.97%, 0.3µ .....	OAH2412
Primary/Secondary Filter (qty 20)...	OAP2614
Intake Manifold, 10" .....	OAIM1300-10
Quick Clamp, 8 to 10" .....	QCW12
Flexible Duct, 10" x 25' .....	OAD10
OdorGuard 600 Carbon Filter.....	OG2412

### Optional Accessories

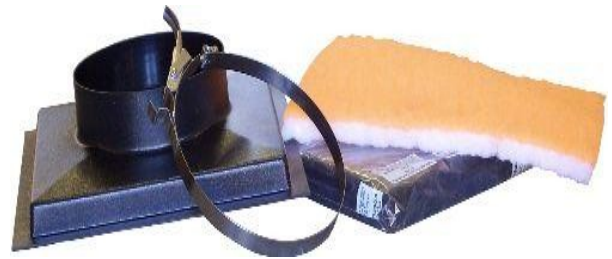

CONFORMS TO UL STD 507  
CERTIFIED TO CAN/CSA STD  
C22.2 NO. 113-M1984

## Omnitec Design, Inc.

4640 Campus Place, Suite 110 Mukilteo, WA 98275

Visit us @ [www.omnitecdesign.com](http://www.omnitecdesign.com)

Office: 425-290-3922